





EN 353-2

+ FA 20 103 XX
(sold separately)

EN 353-2

MAXI 200 KG
(rescue only)

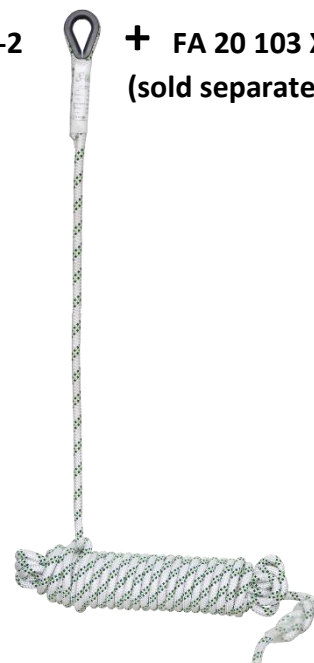

EN 12841

+




+




FA 70 011 99 (lg./m) / FA 70 000 98
(sold separately)

HS CODE
84798997
CARTON SIZE / PCS.
43 x 43 x 8 cm / 20
AET N°2777/10860-03/E02-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.01
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland
AET (UKCA) N°AB0321/16010-01/E01-01
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
MODULE D 11 IN14/14003
SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom


REF.	FA 20 103 00A
LG.  KG	---
CE	EN 353-2:2002, EN 12841:2006
MAT.	
	YES
	
R(kN)	15 kN
+	(1) EN 353-2 : MAX. 200 KG (rescue only) (2) FA 20 103 10 / FA 20 103 15 / FA 20 103 20 / FA 20 103 30 / FA 20 103 40 / FA 20 103 50
	0.35 KG



Longueur Poids maxi utilisateur
Length Max. user weight
Longitud Peso máximo del usuario
Lunghezza Peso Max. dell'utente
Länge Höchstgewicht des Benutzers



Matière connecteur
Material of connector
Material conector
Materiale connettore
Material des Verbinders



Coulisseau doté d'un point fixe
Rope grab with a fixed point lock
Corredera provista de punto fijo
Guida a punto fisso
Gleitelement mit Festpunkt

+

(1)

Point fort
Key feature
Ventaja principal
Punti forti
Produktvorteil

+

(2)

À utiliser avec
To be used with
Para usar con
Ad essere utilizzato con
Verwendet werden soll mit